




NEA

'Line of light'


Designed by
Peter Straka
Vienna 2007

Light in its purest and most simple form, the lighting object reduced to a simple fixture. A tube of light suspended or mounted on a wall at a single point.

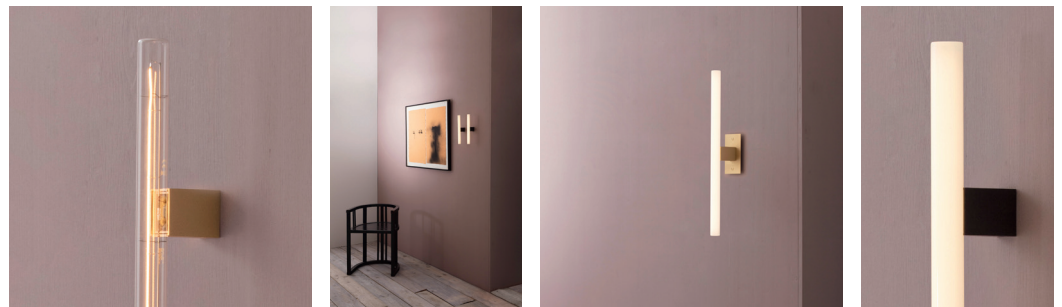

NEA

Wall / Ceiling
50

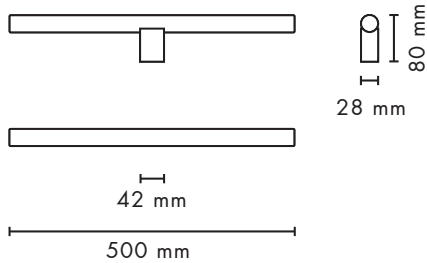


Type
Material
Environment
Dimensions
Weight
Certification
EU/UK
Lamps

Wall/ceiling light
Solid brass
Indoors. Zone 3
500 x 80 mm
0.3 kg
IP20 CE
230 V
Linear opal LED S14d*, 7 W, 2700 K,
Mains (Phase) dimmable, opal 450 lm,
Energy Class A

039 01 101
039 01 202
039 01 208


Polished nickel
Brushed brass
Patinated brass

NEA
Wall / Ceiling
30



Type	Wall/ceiling light
Material	Solid brass
Environment	Indoors. Zone 3
Dimensions	300 x 80 mm
Weight	0.3 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	Linear opal LED S14d*, 4.5 W, 2700K, Mains (Phase) dimmable, opal 250 lm, Energy Class A
039 02 101	Polished nickel
039 02 202	Brushed brass
039 02 208	Patinated brass


NEA
Wall / Ceiling
Plate 50

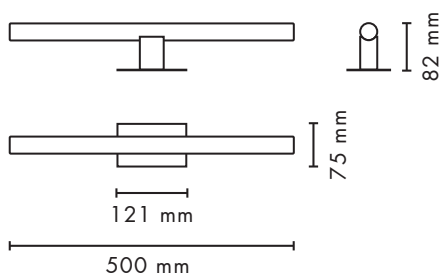

Type	Wall/ceiling light
Material	Solid brass
Environment	Indoors. Zone 3
Dimensions	500 x 75 x 82mm
Weight	0.4 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	Linear opal LED S14d*, 7 W, 2700 K, Mains (Phase) dimmable, opal 450 lm, Energy Class A
039 03 101	Polished nickel
039 03 202	Brushed brass

Mainly suitable for installation onto plaster walls and joinery. For further information please see NEA Plate Mounting Instructions and contact sales@kaia.at.

NEA
Wall / Ceiling
Plate 30




Type	Wall/ceiling light
Material	Solid brass
Environment	Indoors. Zone 3
Dimensions	300 x 75 x 82 mm
Weight	0.4 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	Linear opal LED S14d*, 4.5 W, 2700 K, Mains (Phase) dimmable, opal 250 lm, Energy Class A
039 01 101	Polished nickel
039 01 202	Brushed brass

Mainly suitable for installation onto plaster walls and joinery. For further information please see NEA Plate Mounting Instructions and contact sales@kaia.at.

NEA


Wall / Ceiling
50
Mirror

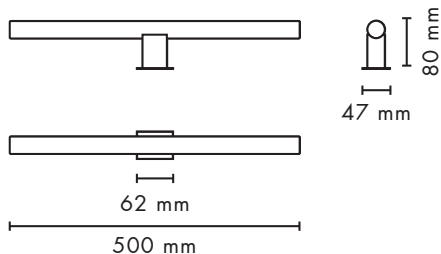

Type	Ceiling/wall light
Material	Solid brass. Zone 3
Environment	Indoors
Dimensions	500 x 47 x 80 mm
Weight	0.6 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	Linear opal LED S14d*, 7 W, 2700 K, Mains (Phase) dimmable, 470 lm, energy class A
039 07 101	Polished nickel
039 07 201	Brushed nickel
039 07 202	Brushed brass
039 07 208	Patinated brass
039 07 209	Blackend brass

NEA

Wall / Ceiling
30
Mirror



Type	Ceiling/wall light
Material	Solid brass
Environment	Indoors. Zone 3
Dimensions	300 x 47 x 80 mm
Weight	0.6 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	Linear opal LED S14d*, 4.5 W, 2700 K, Mains (Phase) dimmable, 250 lm, energy class A
039 08 101	Polished nickel
039 08 201	Brushed nickel
039 08 202	Brushed brass
039 08 208	Patinated brass
039 08 209	Blackend brass

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.